

AR-DVR5100E-C Series 1080HD-DVR


AR-DVR5104E-C / AR-DVR5108E-C / AR-DVR5116E-C

Key Features

- Auto adjust the frame resource to fit video connected
- All channel synchronous playback
- Plug-in Free, to support IE, Chrome, Firefox, Safari Browser
- All channel synchronous live view and playback by smart phone
- H.264 video Compression
- Up to 16 1080P AHD / Analog camera can be accessed
- HDMI / VGA at up to 1080P
- Supported 1HDD and up to 8TB each
- 1 self-adaptive 10/100Mbps RJ45 interface
- Auto record when camera connected



Physical Interfaces

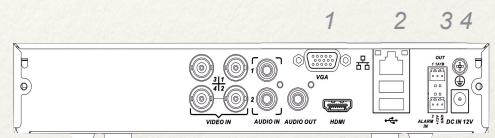

- 11 10 9 8 7 6 5
- 1.VGA 2.Network Interface 3.Alarm Out 4.GND
 5.DC 12V 6.Alarm In 7.USB 8.HDMI
 9.Audio Out 10.Audio In 11.Video In

Model		AR-DVR5104E-C	AR-DVR5108E-C	AR-DVR5116E-C
Video /	AHD video input	4 Ch.	8 Ch.	16 Ch.
		BNC interface (1.0Vp-p, 75Ω)		
Audio input	Supported camera types	AHD / Analog, 1080P30, 1080P25, 720P30, 720P25, 960H		
	Audio input	2 Ch. RCA interface (2.0Vp-p, 1KΩ)		
Video /	HDMI / VGA output	1080p (1920×1080)/60Hz, 720p (1280×720)/60Hz, UXGA (1600×1200)/60Hz, 1280×1024/60Hz		
Audio output	Audio output	RCA (Linear, 1KΩ)		
	Video compression	H.264		
	Dual-stream	Support		
Video /	Encoding resolution	1080H (960×1080), 720P (1280×720), 960H, D1		
Audio codec	Frame rate	120fps	120fps	240fps
	Audio compression	G.711u		
	Synchronous playback	All channel synchronous playback		
HDD	SATA	1× SATA interface for 1 HDD		
	Capacity	Up to 8TB capacity for each HDD		
	Network	1× 10/100Mbps self-adaptive RJ45 interface		
External	USB	Rear panel: 2× USB2.0		
interfaces	Alarm	2 in / 1 out		
	RS-485	N/A		
	Power supply	12V 24W		
General	Operating condition	-10°C – 55°C (14°F – 131°F), Humidity 10 - 90%		
	Dimensions (W×D×H)	254×1732×45mm (10.3"×7.0"×1.8")		380×290×45mm (15"×11.4"×1.8")